



BFDC

Fire-resistant butterfly damper
CE marked in accordance with EN 15650:2010
Tested in accordance with EN 1366-2
Classified in accordance with EN 13501-3
Fire-resistant up to 120 minutes

Available types

BFDC-

- B** butterfly damper
- F** fire-resistant
- D** damper
- C** round, insert for a spiral duct

- Accessories

- V** suitable for an extraction valve. The RRSVKO can be used as an extraction valve.

SA-Select

Check [SA-Select](#) to create extended order codes and selection details online. **NB!** At this moment, SA-Select is only available in Dutch. But it is possible to create extended order codes and selection details online.

Use

The round butterfly fire dampers type BFDC can be built into fire-separating walls and floors. It is easy to push the butterfly damper in the spiral duct and it requires no further fixing. The element can also be supplied with longer housing, suitable for an extraction valve. For the classification list and the corresponding installation instructions, please see the [manual](#) on our website. Certified use requires compliance with the installation instructions in the manual.

Finish

Housing:	steel
Damper blade:	heat-resistant, thickness 6 mm
Fusible link:	72 °C (fusible link)


Optional

End switch

Classified in accordance with EN 13501-3

For a full classification overview with the various sealing methods, we refer to the [manual](#).

Dimensions

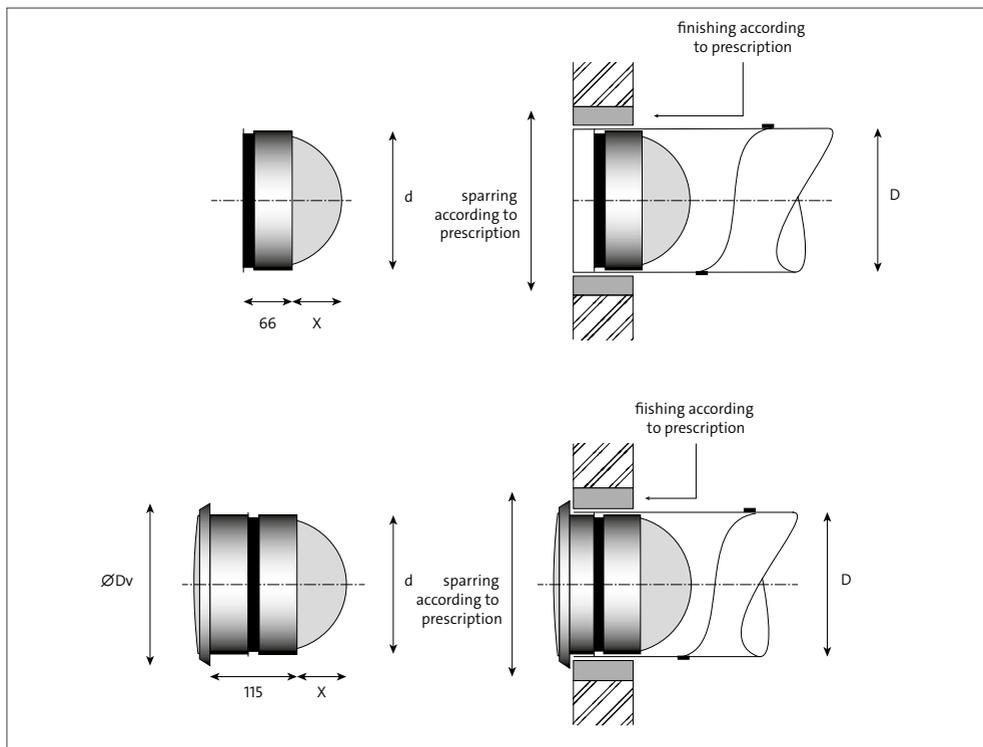

Available dimensions

model	d	D	X	Dv
100	98.5	100	18	150
125	123.5	125	30,5	185
160	158.5	160	48	220
200	198.5	200	68	260

Fitting

The fire damper is fitted, in a closed position, in line with statutory requirements in accordance with the [manual](#).