

# PRIMON

Perforated diffuser

Return, transfer

T-bar mounted in modular ceiling

Sightproof, restricts the entry of light

## Use

The PRIMON perforated diffuser is sightproof, restricts the entry of light, and is suitable for the transfer of air to the ceiling plenum. The perforation is the same as for the PTVM and PRVM diffusers.

The diffuser can be T-bar mounted in a modular ceiling with a panel size of 600 mm.

## Version

### Perforated diffuser

front face:	steel
post-treatment:	epoxy
front face colour:	white RAL 9010
internal unit colour:	black RAL 9005
weight:	3.6 kg

## SA-Select


Check [SA-select](#) to create extended order codes and selection details online. **NB!** At this moment, SA-Select is only available in Dutch. But it is possible to create extended order codes and selection details online.

## Available types


### PRIMON

- P** perforated ceiling diffuser
- R** return, transfer
- I** flat face plate
- M** modular ceiling, panel size 600 mm
- O** no accessories
- N** sightproof and restricts the entry of light

## Dimensions

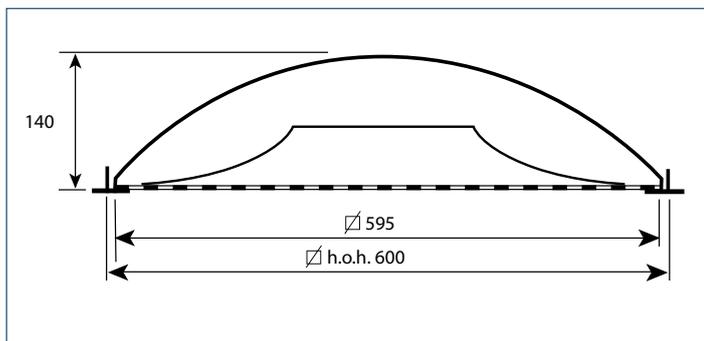

## Fitting instructions

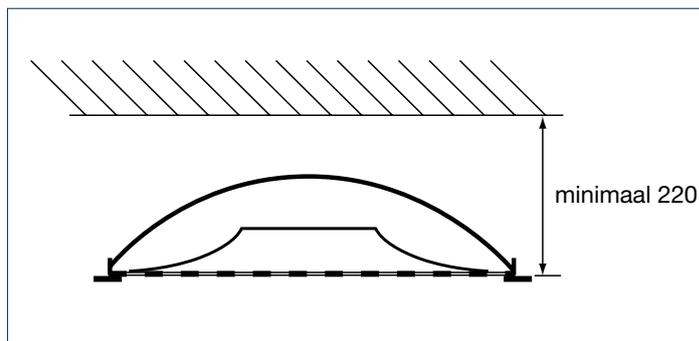

## Selection details

### PRIMON

air volume		model	$\Delta p_s$ Pa	$L_{pA}$ dB(A)
m <sup>3</sup> /s	m <sup>3</sup> /h			
0.080	<b>288</b>	550	2	-
0.100	<b>360</b>	550	3	-
0.125	<b>450</b>	550	5	-
0.150	<b>540</b>	550	7	10
0.200	<b>720</b>	550	12	17

## Note

- The dimensions are in mm.
- The assumed room attenuation is 10 dB.
- It is permitted to interpolate the interim values.