



RTSV

Valve
Supply
Adjustable

Available types

RTSV-O

R round
T supply
S steel
V valve

- Version

M mounting ring
K spring clips for mounting in spiro duct

O not applicable

Quick selection

m ³ /h	model
0-50	100
51-75	125
76-120	160
121-170	200

SA-Select

Check SA-Select to create extended order codes and selection details online. **NB!** At this moment, SA-Select is only available in Dutch. But it is possible to create extended order codes and selection details online.

Use

The round RTSV supply valve is suitable for supplying ventilation air with a limited temperature difference in respect of the room temperature.

Characteristics

- The RTSVMO type is supplied with a mounting ring.
- The RTSVKO type is supplied with spring clips.

Version

Supply valve

Material: steel
Post-treatment: epoxy
Colour: white RAL 9010, optional RAL colour of your choice


Seal

Connection: foam rubber

Mounting ring

Material: sendzimir galvanised steel

Maatvoering

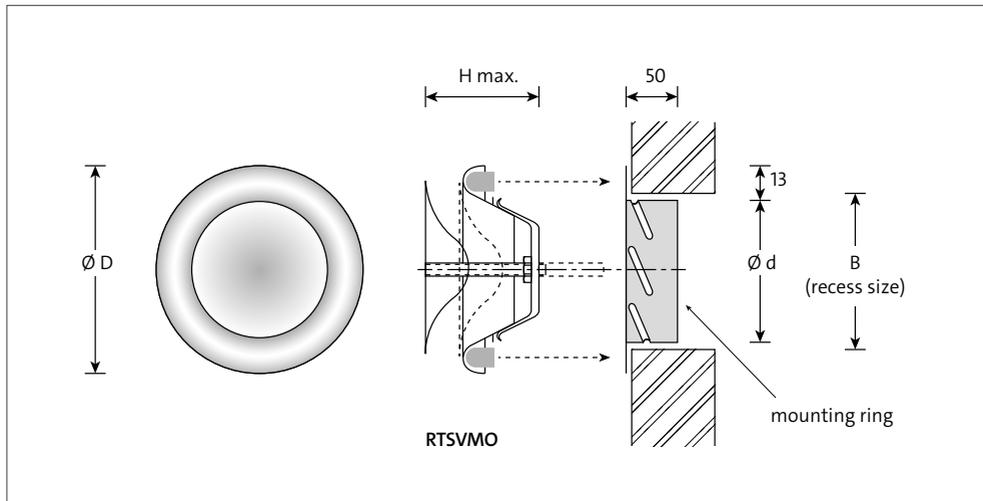

Available dimensions, sizes and weights

model	d	B	D	H max.	kg
80	79	86	115	42	0.150
100	99	106	138	40	0.170
125	124	130	164	46	0.230
160	159	166	211	54	0.370
200	199	206	248	63	0.520

Note

- The listed dimensions are in mm.

General

- The zero position of the valve is the position where the front of the cone is in one continuous line with the front of the outer ring.
- The desired position is achieved by turning the cone.

